


DEEP BLUE 3.0

Mono

505W MBB Half-cell Module
JAM66S30 480-505/MR/1000V Series

Introduction

Assembled with 11BB PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.

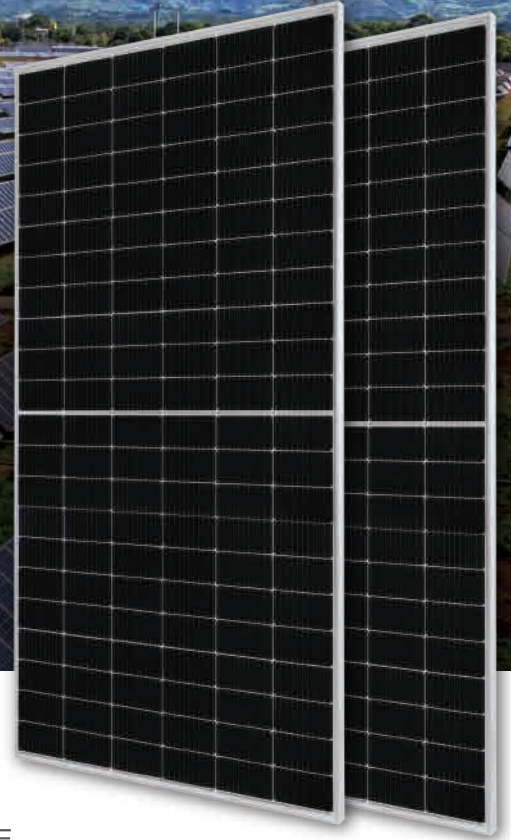

Higher output power



Lower LCOE



Less shading and lower resistive loss




Better mechanical loading tolerance

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

0.55% Annual Degradation Over 25 years

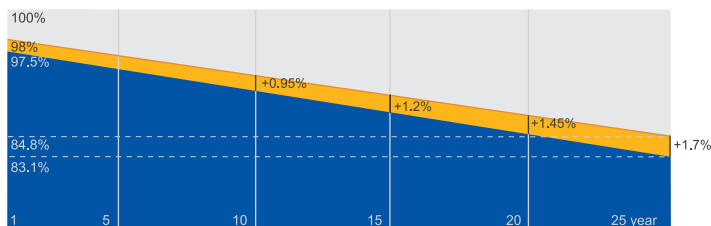

■ New linear power warranty ■ Standard module linear power warranty


Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems



MECHANICAL DIAGRAMS

SPECIFICATIONS

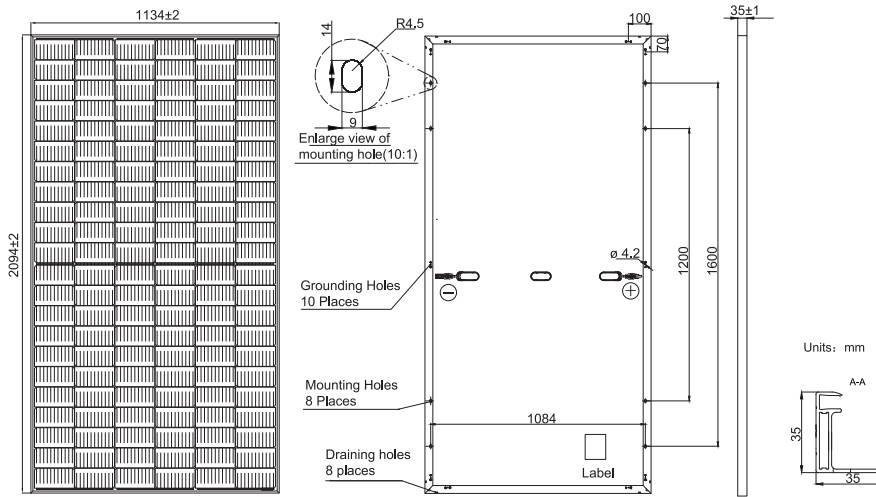

Cell	Mono
Weight	26.3kg±3%
Dimensions	2094±2mm×1134±2mm×35±1mm
Cable Cross Section Size	4mm ² (IEC) , 12 AWG(UL)
No. of cells	132(6×22)
Junction Box	IP68, 3 diodes
Connector	Genuine MC4 QC4.10
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-); Landscape: 1200mm(+)/1200mm(-)
Country of Manufacturer	China/Vietnam

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC

TYPE	JAM66S30 -480/MR/1000V	JAM66S30 -485/MR/1000V	JAM66S30 -490/MR/1000V	JAM66S30 -495/MR/1000V	JAM66S30 -500/MR/1000V	JAM66S30 -505/MR/1000V
Rated Maximum Power(P _{max}) [W]	480	485	490	495	500	505
Open Circuit Voltage(V _{oc}) [V]	45.07	45.20	45.33	45.46	45.59	45.72
Maximum Power Voltage(V _{mp}) [V]	37.62	37.81	37.99	38.17	38.35	38.53
Short Circuit Current(I _{sc}) [A]	13.65	13.72	13.79	13.86	13.93	14.00
Maximum Power Current(I _{mp}) [A]	12.76	12.83	12.90	12.97	13.04	13.11
Module Efficiency [%]	20.2	20.4	20.6	20.8	21.1	21.3
Power Tolerance	0~+5W					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.275%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.
Measurement tolerance at STC: P_{max} ±3%, V_{oc} ±2% and I_{sc} ±4%.


ELECTRICAL PARAMETERS AT NOCT

OPERATING CONDITIONS


TYPE	JAM66S30-480 /MR/1000V	JAM66S30-485 /MR/1000V	JAM66S30-490 /MR/1000V	JAM66S30-495 /MR/1000V	JAM66S30-500 /MR/1000V	JAM66S30-505 /MR/1000V
Rated Max Power(P _{max}) [W]	363	367	370	374	378	382
Open Circuit Voltage(V _{oc}) [V]	42.15	42.30	42.43	42.58	42.72	42.86
Max Power Voltage(V _{mp}) [V]	35.54	35.67	35.76	35.84	35.93	36.02
Short Circuit Current(I _{sc}) [A]	10.99	11.06	11.13	11.20	11.27	11.34
Max Power Current(I _{mp}) [A]	10.21	10.28	10.36	10.44	10.52	10.60
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G					
Maximum System Voltage	1000V DC(IEC)					
Operating Temperature	-40°C ~ +85°C					
Maximum Series Fuse Rating	25A					
Maximum Static Load, Front*	3600Pa, 1.5					
Maximum Static Load, Back*	1600Pa, 1.5					
NOCT	45±2°C					
Safety Class	Class II					
Fire Performance	UL Type 1					

CHARACTERISTICS

Current-Voltage Curve JAM66S30-495/MR/1000V

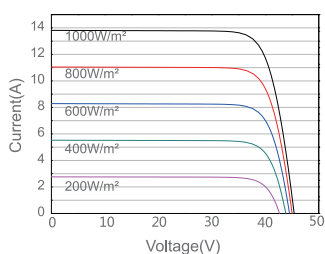

Power-Voltage Curve JAM66S30-495/MR/1000V

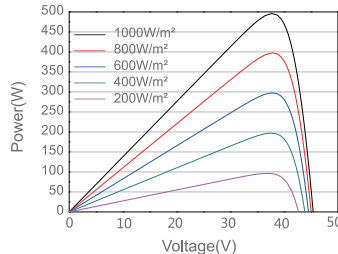

Current-Voltage Curve JAM66S30-495/MR/1000V

